



# PLT<sup>®</sup> Line Retrieval



Anchor Handling  
Emergency Towing  
Bunkering Operations



Article 1005	PLT Launching Unit	1
	1 Air Cylinder, 300bars/4350psi or 200bars/2900psi	
	1 Launching Unit	
	1 Cover for air cylinder	
Article 3303	Launching Tube 125/150	1
Article 7002	PLT Line Pick-up Grapple	1
Article 6201	Line box 5mm floating line	1
	Line box containing line art no 6109, polypropylene (120m). Breaking strength 440kg. Floats and has a very bright yellow color. Breaking strength: 440kg.	
	Other options of line on request	
	User Manual and USB stick included	

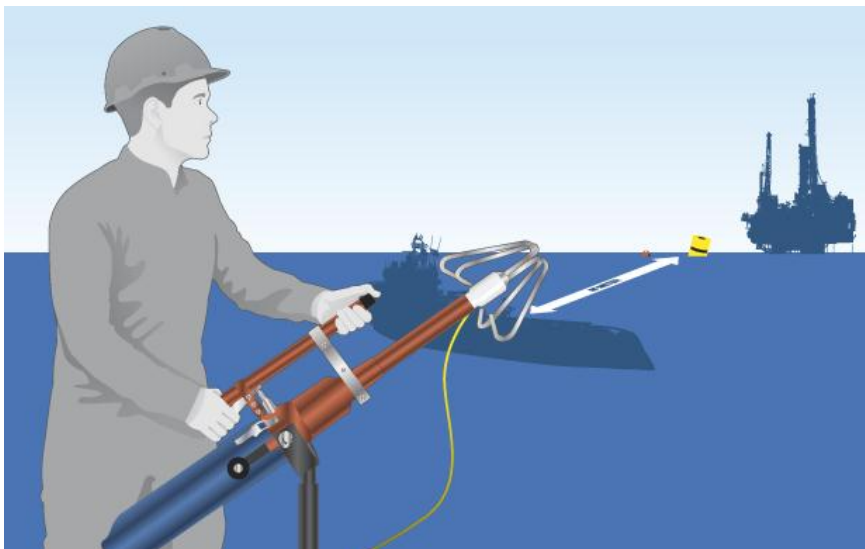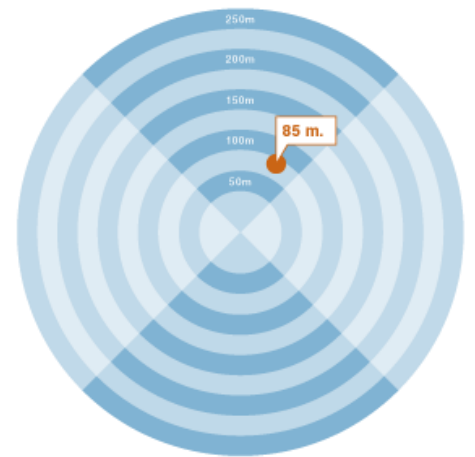

## Operations

The PLT is used by Anchor Handlers to safely and effectively grab the anchor buoy softline. This is done by having a secondary small buoy attached to the free end of the softline.

You can launch the Line Pick-up Grapple up to 85 meters from a safe and elevated spot on your vessel.